

Berridge B-6 Panel

WALL, SOFFIT, CEILING AND FASCIA PANEL SYSTEM



The Berridge B-6 Panel is used for walls, soffit, ceilings, and fascia. It can be installed over open framing or solid sheathing, providing an extruded vee-groove pattern.



Materials

24 Gauge Steel

Specifications

Uses: Wall, Soffit, Ceiling, Fascia, Screen Wall, Berridge Fencing System


Coverage: 6"

Finishes: Smooth

Fasteners: Concealed

Applications: Vertical over open framing or solid sheathing

Profile: Extruded vee-groove

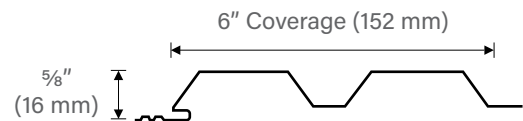

Installation

- Panel is available from the factory in continuous lengths up to a maximum of 40'.
- Panel may be used on curved walls but the panel itself does not curve. Consult the Berridge Technical Department for installation details at Technical@Berridge.com.

Pictured Above


Project: Post S. Lamar

Architect: LRK Architects

General Contractor: Rampart Construction

Installing Contractor: Greater Dallas Roofing, LLC

Color: Terra-Cotta

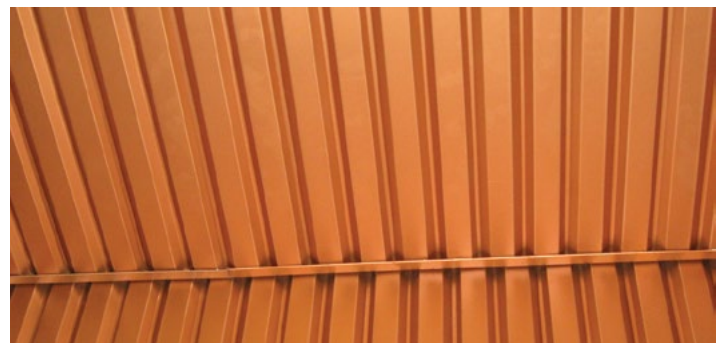

Pictured Above

Interior Installation Example

BERRIDGE B-6 PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
PERFORMANCE	■ Uplift Resistance	ASTM E-330	Test method to determine structural performance under uniform static air pressure	See Load Chart on Berridge website

■ - Steel only □ - Steel and Aluminum
For further details please visit www.berridge.com



CORPORATE HEADQUARTERS

2610 Harry Wurzbach Road
San Antonio, TX 78209
(800) 669-0009
www.Berridge.com