

# Berridge "M" Panel

## EXPOSED FASTENER PANEL SYSTEM



*The Berridge "M" Panel is a wide, economical panel providing 36" of coverage for vertical and horizontal applications with exposed fasteners.*



### Materials

24 and 22 Gauge Steel  
0.032 Aluminum

### Specifications

Uses: Roof, Wall, Soffit, Ceiling, Fascia, Mansard, Sheathing, Screen Wall

Coverage: 36"

Finishes: Smooth

Fasteners: Exposed


Applications: Open framing or solid sheathing\*

### Installation

- Panel is available from the factory in continuous lengths to a maximum of 40'
- Structural properties allow it to be utilized as a sheathing option
- Estimate 115 fasteners/sq
- Use inside and outside foam closures to help prevent air infiltration at ridges, eaves, head walls, etc.
- Use expandable foam filler tape per installation details at closure at hips and valleys
- Use mastic sealant tape per installation details at panel endlaps, sidelaps, skylights, with foam closure, etc.

Note:

\* Vertical or horizontal for wall applications.

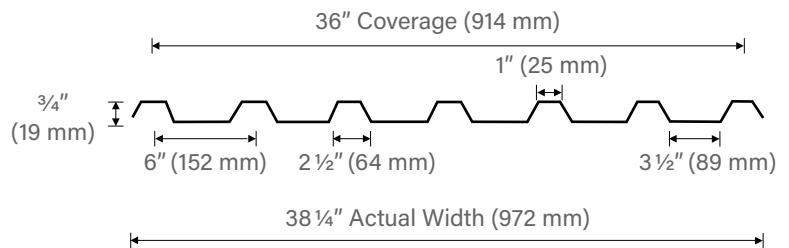

*Pictured Above*

Project: Laramie Ice Arena - Laramie, WY  
Architect: Ohlson Lavoie Collaborative of Denver, CO  
General Contractor: JC Construction of Laramie  
Installing Contractor: JC Construction of Laramie  
Color: Almond

All information subject to change without notice. See website for details, specifications and Watertightness Warranty requirements.

© Berridge Manufacturing Company 2024 • (800) 669-0009 • www.Berridge.com

## BERRIDGE "M" PANEL TESTING AND CERTIFICATION SUMMARY CHART

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
FIRE	■ Room Fire Performance	UL 790	Test methods for fire tests of roof coverings	Class A Rating
ENVIRONMENTAL	■ Impact Resistance	UL 2218	Impact resistance of prepared roof coverings	Class 4 Rating
PRODUCT LISTINGS	■ Florida Product Approval	TAS 125	Local and state approval of products and systems for compliance with the structural requirements of the Florida Building Code	FL# 14210.6 (24 GA-Purlins) FL# 14669.4 (24 GA-Girts)
	■ Underwriters Laboratories	UL 580 Uplift Class 90	Standard for Tests for Uplift Resistance of Roof Assemblies	Construction No. 39 (24 GA - Purlins)

■ - Steel only    □ - Steel and Aluminum  
 For further details please visit [www.berridge.com](http://www.berridge.com)



**CORPORATE HEADQUARTERS**  
 2610 Harry Wurzbach Road  
 San Antonio, TX 78209  
 (800) 669-0009  
[www.Berridge.com](http://www.Berridge.com)